


- ventilator centrifugal cu palete orientate inapoi
- carcasa metalica tabla zincata
- turatie reglabila
- termocontact integrat
- unitate ventilator rabatabila
- izolat fonic

**230V 50Hz**

punct de functionare		1	2	3	4	5
curent	I A	0.35	0.39	0.42	0.42	0.41
consum de putere	P <sub>1</sub> W	75	85	95	95	90
turatie	n 1/min	2700	2590	2500	2500	2530
put. fonica aspiratie	L <sub>WA5</sub> dB (A)	-	60	56	57	60
put. fonica refulare	L <sub>WA6</sub> dB (A)	-	70	68	71	75
put. fonica radiatie	L <sub>WA2</sub> dB (A)	-	53	51	51	54
Tensiunea	U <sub>N</sub>	230V ~	reglaj turatie		V	
curent	I <sub>N</sub>	0.4 A	protectie motor		TAI	
curent	I <sub>max</sub>	0.5 A	condensator		2,5 μF / 450 V	
temperatura ambianta	t <sub>U</sub>	80 °C	clasa de izolare		F	
temperatura medie	t <sub>F</sub>	80 °C	numarul de poli		2	
			greutate		17,55 kg	

**accesorii pentru ISOR 200 E2 11**  
 pentru mai multe informatii vezi internet

- MTY 1 regulator electronic continuu
- ETY 15 regulator electronic continuu
- TEE 015 transformator in 5 trepte fara protectie motor
- TES 0145 transformator 7 trepte fara protectie motor
- GS 01 comutator
- VM 200 manseta de legatura pentru reducerea zgomotului si vibratiilor
- RSK 200 clapeta anti-retur
- RSK 200D clapeta anti-retur cu izolare
- SG 200 01 grilaj de protectie
- SDS 200 atenuator de zgomot rigid
- SDF 200 atenuator de zgomot flexibil
- FV 200 cutie filtranta cu filtru material G3

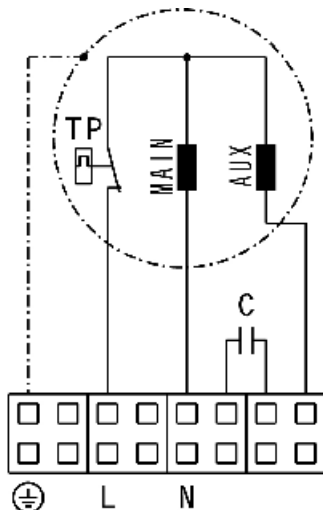

116985

